
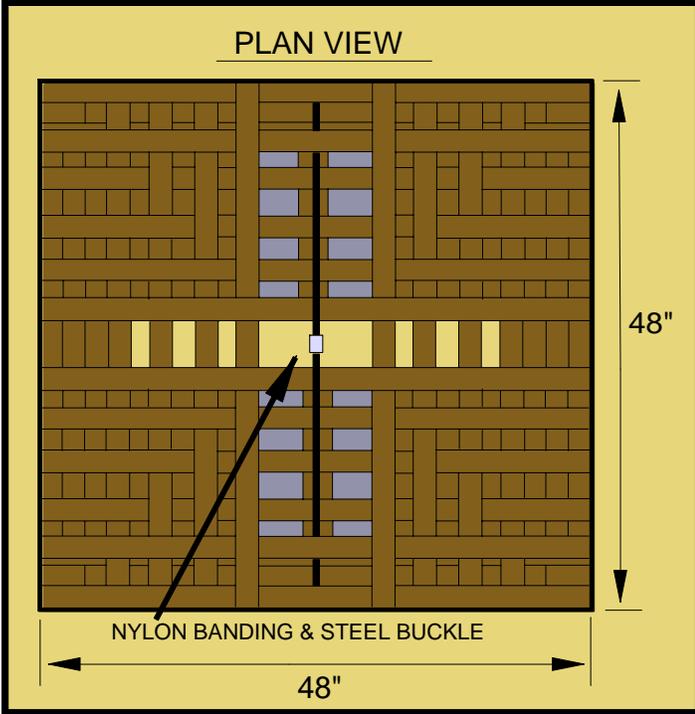
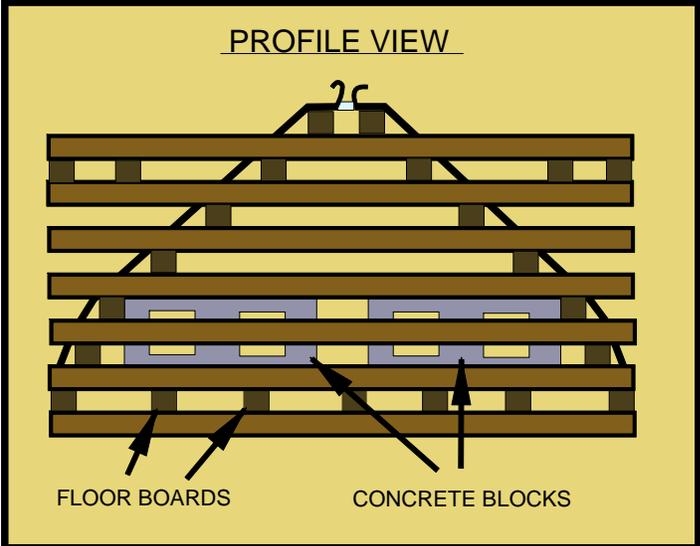


PENNSYLVANIA PORCUPINE CRIB JUNIOR STRUCTURE STANDARD DRAWING

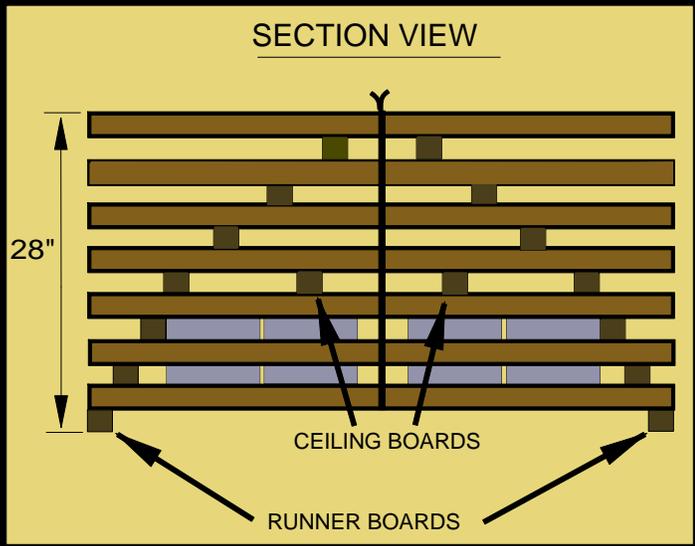

MATERIALS AND NOTES

MATERIALS:
 ROUGH CUT HEMLOCK LUMBER 2" x 2" x 4'- 38 PIECES
 8" x 8" x 16" 2 CORE CONCRETE BLOCKS- 8 TOTAL
 16D COMMON NAILS- 2 LBS. (OR 2 STRIPS OF 12D)
 1/2" NYLON BANDING- 18'
 1 STEEL BUCKLE

NOTES:
 LUMBER MUST BE TRUE DIMENSIONAL
 LUMBER MUST BE GREEN (FRESH CUT)
 YELLOW POPLAR MAY BE SUBSTITUTED FOR HEMLOCK
 CONCRETE BLOCKS MINIMUM WEIGHT: 35 LBS
 NYLON BANDING: 600 LBS TENSILE STRENGTH
 NOT TO SCALE
 ALL SIZES ARE APPROXIMATE
 FIT IN FIELD