
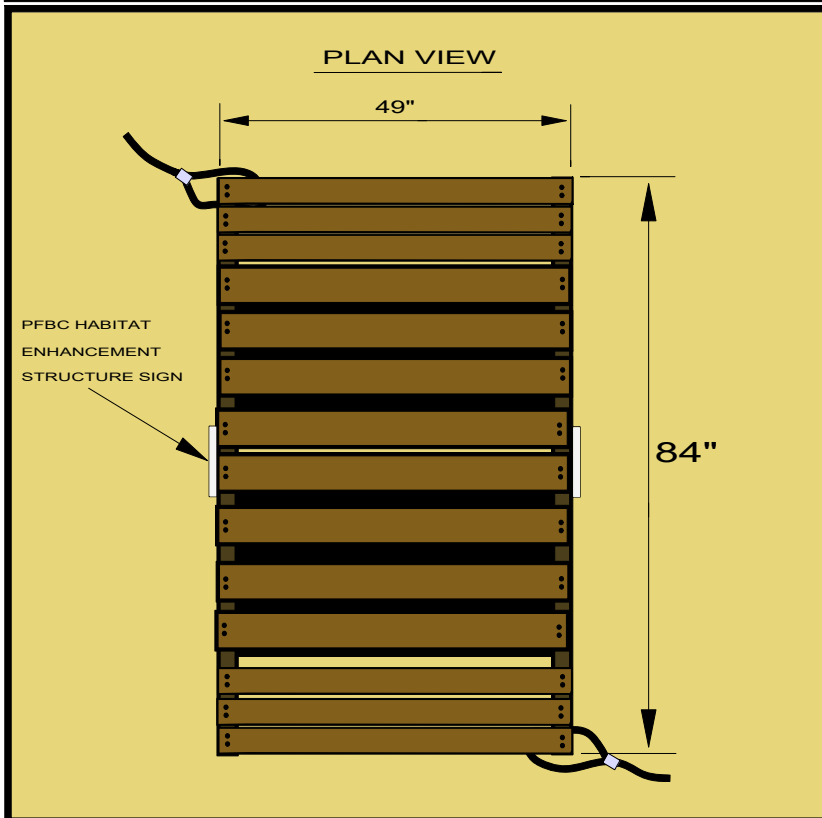
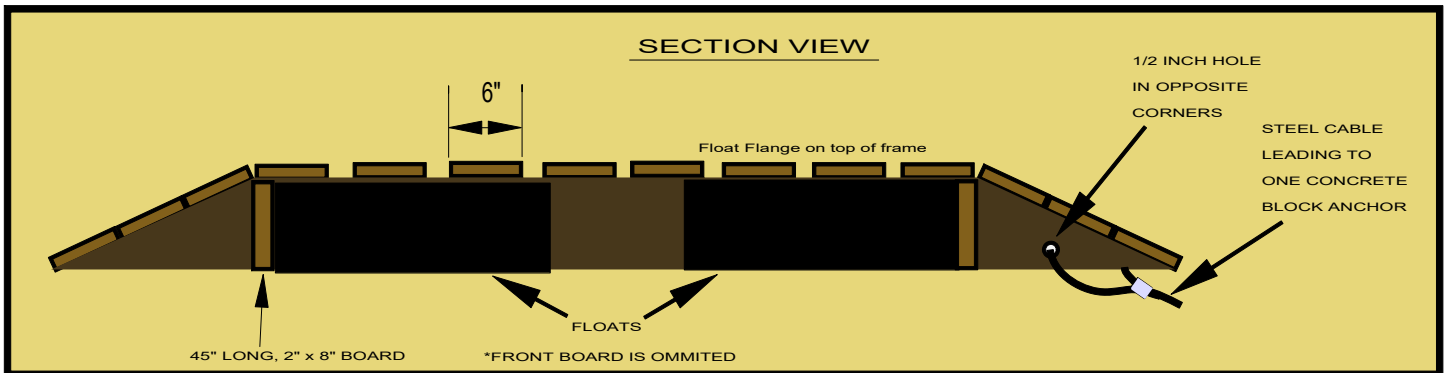


# PENNSYLVANIA TURTLE BASKING PLATFORM

## STANDARD DRAWING

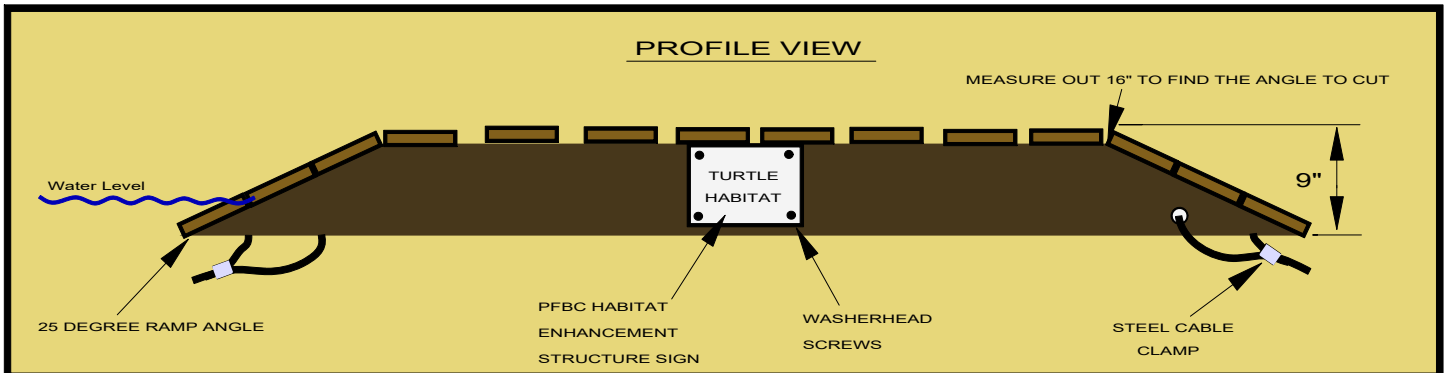

- MATERIALS AND NOTES
- MATERIALS:
- ROUGH CUT HEMLOCK LUMBER 2" X 8" X 45" - 2 PIECES
  - ROUGH CUT HEMLOCK LUMBER 2" X 8" X 84" - 2 PIECES
  - ROUGH CUT HEMLOCK LUMBER 1" X 6" X 49" - 14 PIECES
  - 2' X 4' X 8" DOCK FLOATS - 2 PIECES
  - 2 CORE CONCRETE BLOCK 8" X 8" X 16" - 2 PIECES
  - 3" DECK SCREWS - 20 PIECES
  - 5" DECK SCREWS - 70 PIECES
  - 1/4" STAINLESS STEEL WIRE CABLE 10' - 2 PIECES
  - 1/4" STAINLESS STEEL CABLE CLAMPS - 4 PIECES
  - PFBC HABITAT ENHANCEMENT SIGNS - 2 PIECES
  - 1" CAP NAILS - 4 PIECES
- NOTES:
- LUMBER MUST BE TRUE DIMENSIONAL
  - YELLOW POPLAR MAY BE SUBSTITUTED FOR HEMLOCK
  - LUMBER MUST BE GREEN (FRESH CUT)
  - CONCRETE BLOCKS MINIMUM WEIGHT: 35 LBS
  - NOT TO SCALE
  - ALL SIZES ARE APPROXIMATE
  - FIT IN FIELD